

Shenzhen HSC Electronics Co.,Ltd

Round LED Display



Web: www.hsclcd.com | Email: sales@hsclcd.com | Mobile: +86 198 6770 2730



Model: P2mm

Bezel free

Diameter: 512mm, 840mm, 1200mm,
1560mm, 2040mm, 2520mm, 3000mm

Model: P2.5mm

Bezel free

Diameter: 500mm, 700mm, 1000mm, 1500mm, 2000mm, 2500mm, 3000mm



Model: P2.5mm
Diameter: 1152mm, 1330mm



Web: www.hsclcd.com | Email: sales@hsclcd.com | Mobile: +86 198 6770 2730




Model: P3mm
Diameter: 1000mm


Model: P3.125mm
Diameter: 500mm, 1000mm, 1500mm, 2000mm,
2500mm, 3000mm

Model: P3.9mm
Diameter: 500mm, 1000mm, 1500mm, 2000mm

Applications

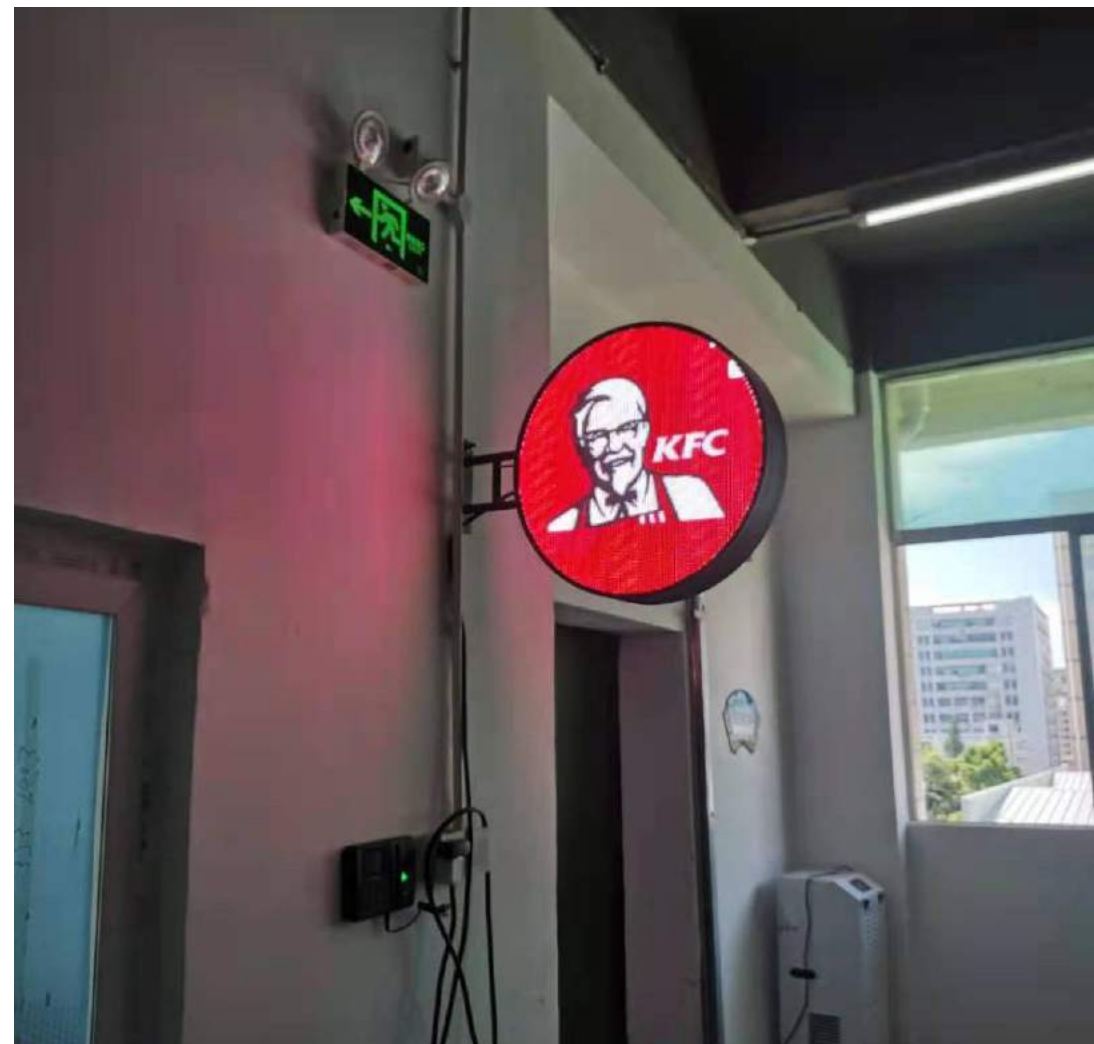

Web: www.hsclcd.com | Email: sales@hsclcd.com | Mobile: +86 198 6770 2730

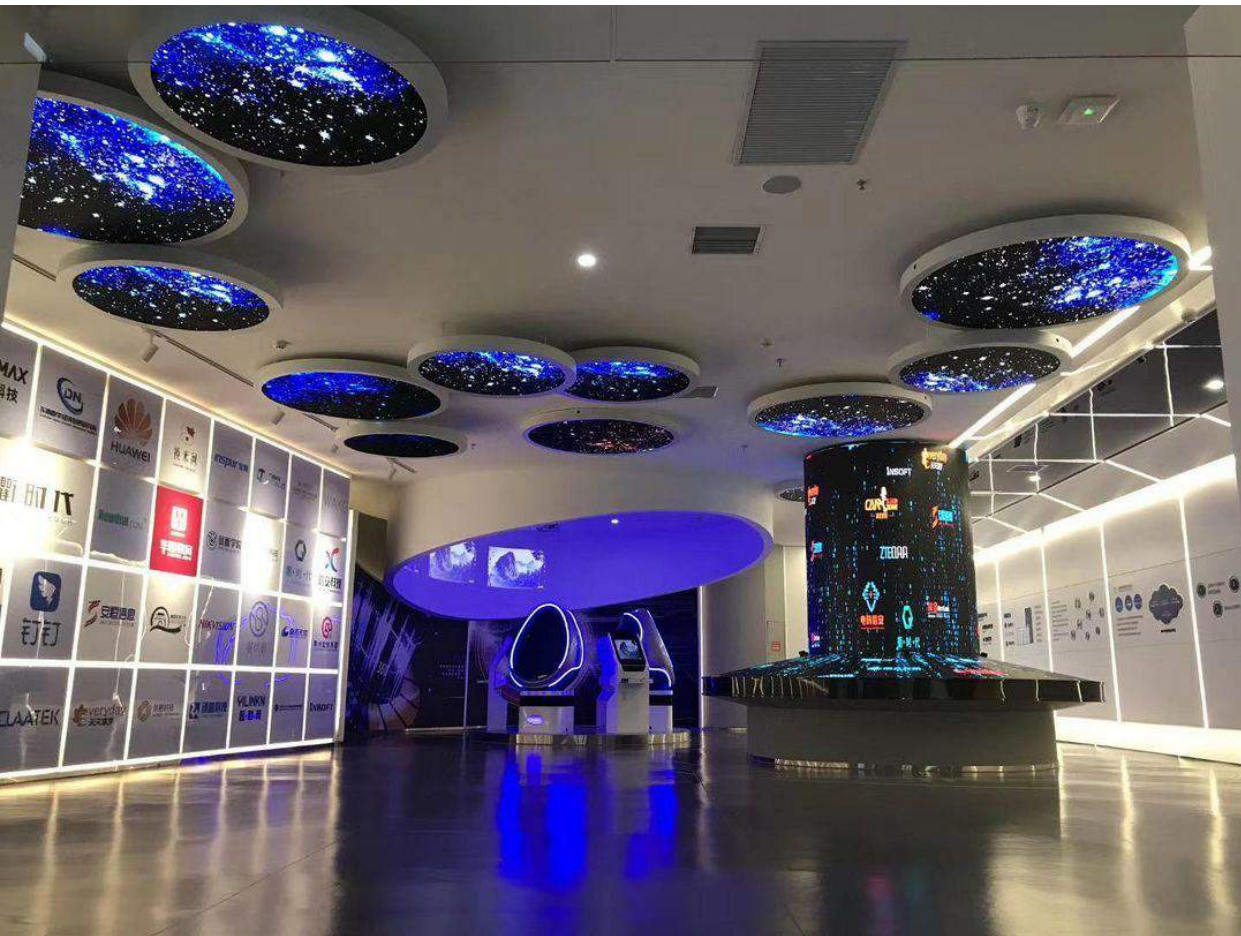

Web: www.hsclcd.com | Email: sales@hsclcd.com | Mobile: +86 198 6770 2730

Specifications

Model	P2	P2.5	P2.5	P2.5	P3
LED	SMD1515	SMD2020	SMD2020	SMD2020	SMD2020
Pixel Density	250,000 Pixels/m ²	160,000 Pixels/m ²	160,000 Pixels/m ²	160,000 Pixels/m ²	111,111 Pixels/m ²
Diameter	512mm	500mm	1152mm	1330mm	1000mm
Cabinet Material	Iron				
Refresh Rate	3840hz				
Brightness	800nits				
Control Mode	Synchronous/Asynchronous				
Viewing Angle	H: 160°; V: 160°				
Input Voltage	AC100-240V				
Max. Power	550W/m ²				
Ave. Power	200W/m ²				
Working Temperature	-20°C ~ +50°C				
Working Humidity	10%—90%RH				