

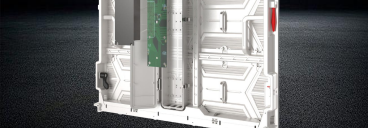


960 die-casting + aluminum bottom shell 960 die casting + plastic bottom shell



Product Model	P4.41	P5.71	P6.66	P8	P10
Pixel pitch	4.41mm	5.7mm	6.66mm	8mm	10mm
Pixel composition	SMC1415	SMC2727	SMC2727	SMC3636	SMC3636
Pixel density	50625dots/m ²	30625dots/m ²	22500dots/m ²	15625dots/m ²	10000dots/m ²
Module size	480*320mm	480*320mm	480*320mm	480*320mm	480*320mm
Module resolution	1087/72 dots	847/56 dots	727/48 dots	607/40 dots	487/32 dots
Box size	960*960*96mm	960*960*96mm	960*960*96mm	960*960*96mm	960*960*96mm
Cabinet resolution	2167/216dots	1687/168dots	1447/144dots	1207/120dots	967/96dots
Box weight	<26.5kg	<26.5kg	<26.5kg	<26.5kg	<26.5kg
Waterproof level (front/rear)	IP65	IP65	IP65	IP65	IP65
Brightness	>5000 CD/m ²	>5000 CD/m ²	>5000 CD/m ²	>5000 CD/m ²	>5000 CD/m ²
Scanning method	1/8S	1/7S	1/8S	1/8S	1/8S
Refresh rate	>3840Hz	>3840Hz	>3840Hz	>3840Hz	>3840Hz
Viewing Angle(°/V)	140°/140°	140°/140°	140°/140°	140°/140°	140°/140°
Viewing distance	>9m	>9m	>9m	>9m	>12m
Grayscale	16bit	16bit	16bit	16bit	16bit
Color Type	16.7M	16.7M	16.7M	16.7M	16.7M
Brightness adjustment	0-100 levels adjustable				
Maximum Power	800W/m ²	800W/m ²	800W/m ²	800W/m ²	800W/m ²
Average Power	320W/m ²	320W/m ²	320W/m ²	320W/m ²	320W/m ²
Usage Environment	OUTDOOR	OUTDOOR	OUTDOOR	OUTDOOR	OUTDOOR
Input Power	AC100-240 50/60Hz				
Operating temperature	-20°C~+50°C	-20°C~+50°C	-20°C~+50°C	-20°C~+50°C	-20°C~+50°C
Operating humidity	10-85% RH	10-85% RH	10-85% RH	10-85% RH	10-85% RH
Working life	100,000hours	100,000hours	100,000hours	100,000hours	100,000hours